



Application and project description


The Garderos R-4700 Series of routers are certified for in-vehicle use and provide cyber-secure and reliable data connectivity for mobile applications. The R-4700 Series routers provide 2 LAN ports and various wireless WAN interfaces such as Public Cellular and Private LTE. Configurations such as single wireless WAN or alternatively dual wireless WAN are possible. Local WiFi access is optionally possible. Due to their high processing power, the R-4700 series routers can also host virtualized container applications.



Fig. 1: Garderos R-4700 routers for in-vehicle use.

Key features

- Certified for in-vehicle use
- Central administration
- Scalable up to 10,000 routers with one server
- Routers periodically query server for new firmware or configuration
- Hardware and software watchdogs for highest availability
- Standard interfaces in GCS for easy integration with existing infrastructure
- Cyber security by design: secure protocols and functions

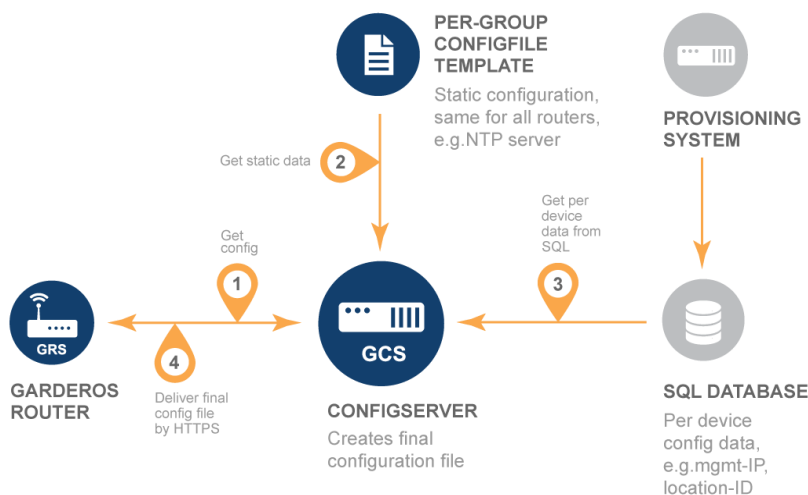

HARDWARE FEATURES

| | | |
|-------------------------------|---|---|
| Casing | Material Dimensions (WxHxD) Weight Ingress protection IEC protection class Mounting | Diecast aluminum ~58x105x126mm ~0.6kg IP42 3 Integrated DIN rail clip and mounting holes for external DIN rail clip or mounting bracket |
| Temperature range | | Operating temperature range depends on router model. Please see "ordering information". |
| Interfaces on casing | Power connector Ethernet connector Serial connector WWAN antenna connector GPS antenna connector WLAN antenna connector SIM card slot | Phoenix 2 pin 2x RJ-45 1x RJ-45 console/data up to 4x SMA (female) 1x SMA (female) (optional) up to 4x RP-SMA (female) 2x Mini-SIM (thermoresistant) or 1x Mini-SIM + 1x MFF-SIM chip (optional) |
| Power supply | Input voltage Power consumption | 12-60 VDC (9,6VDC - 72VDC tolerance) ~7-11W |
| Overheating protection | ambient temperature | off CPU >100°C on CPU < 80°C |
| Serial interface | RS-232 (console) RS-485 half-duplex (data) | 1x 1x |
| WAN | Ethernet (see LAN) | |
| WWAN | Technology CDMA EVDO, 1x CDMA RUIIM, non-RUIIM Passive GPS Dual WWAN | 2G/3G/4G ¹⁾ , 4G ²⁾ , 2G/4G ³⁾ , CDMA ⁴⁾ CDMA ⁴⁾ CDMA ⁴⁾ 2G/3G/4G ¹⁾ |
| LAN | Ethernet Autosensing Auto-MDix | 2x 10/100/1000Base-T |
| WLAN | Supported standards Dual WLAN | 802.11ac a/b/g/n |
| Other features | Hardware watchdog | Monitors "heartbeats" from router OS. Restarts router in case of software problems. |
| Certifications | Criteria for EMI immunity and radiation Vibration resistant Shock resistant Vehicle Approval | IEC 61000-6-2:2005 EN 60068-2-6:2008 EN 60068-2-27:2009 ECE R10 & Homologation (E24) |
| Regulations | RoHS, CE, FCC ^{1,3)} | |

¹⁾ **2G/3G/4G Modul (CAT 4, global variant*)**

LTE B1, B2, B3, B4, B5, B7, B8, B12, B13, B18, B19, B20, B26, B28, B38, B39, B40, B41
WCDMA B1, B2, B4, B5, B6, B8, B19
EDGE/GPRS/GSM 850/900/1800/1900MHz

²⁾ **4G Modul (CAT 4, European variant*)**

LTE/LTE450 B3, B7, B20, B31, B72

³⁾ **2G/4G Modul (CAT M1, European variant*)**

LTE/LTE450 B1, B2, B3, B4, B5, B8, B12, B13, B14, B18, B19, B20, B25, B26, B27, B28, B31, B66, B72, B85
EDGE/GPRS/GSM 850/900/1800/1900MHz

⁴⁾ **CDMA 450MHz Modul**

EV-DO Rev. A, B
1xRTT
R-UIM und non R-UIM

*other variants available

SOFTWARE FEATURES

Operating system

- Garderos Router Software (GRS) Rel. 3.7

Common

- IPv4, IPv6
- IPv4/IPv6 dual stack
- Multiple IP addresses per interface
- IPv6 prefix delegation

WWAN *)

- PPP over WWAN 3, 4)
- Dual WAN (WWAN, Ethernet, VLAN) 1, 2, 3, 4)
- Dual WWAN (WWAN, WWAN) 1, 2, 3, 4)
- Configurable WWAN network selection 1, 2, 3)
- Configurable WWAN band selection 1, 2, 3)
- Multiple APN 2)
- Intelligent APN selection 1, 2)
- WWAN IPv4 1, 2, 3, 4)
- WWAN IPv6 1, 2, 4)
- WWAN dual stack 1, 2, 4)
- IPv6 prefix delegation 2, 4)
- Dual SIM 1, 2, 3)
- Modem firmware update 2)
- XCAL debugging 2)
- CDMA RUIIM and non-RUIIM 3)
- CDMA ESN and MEID authentication 3)

WLAN *)

- 802.11ac a/b/g/n
- AP und Client
- 8x SSID (2,4GHz) + 8x SSID (5,5GHz)
- WPA, WPA2, WPA3
- 802.11i (EAP)

Other network interfaces

Bridge

- Layer 2 bridge interface
- STP, RSTP
- IP assignment static IP, DHCP, IPv6 SLAAC, PD

Ethernet

- Configurable link speed
- IP assignment static IP, DHCP, IPv6 SLAAC, PD
- Port Mirroring
- 802.1x

Local Loop

- Local loop interface
- IP assignment static IP, PD

PPPoE

- IP assignment static IP, PPPoE, IPv6 SLAAC
- PAP and CHAP
- Always on
- Time controlled session termination before provider reconnect

VLAN

- VLAN support (802.1q and priority tagging)
- IP assignment static IP, DHCP, IPv6 SLAAC, PD
- 802.1x

Routing

- Static routes (IPv4, IPv6)
- Static policy routing (IPv4, IPv6)
- Static routes to DHCP gateway (IPv4)
- Dynamic routing protocols RIPv2, OSPFv2, OSPFv3, BGPv4
- Filtering for dynamic routing protocols
- Firewall (IPv4, IPv6, packet filter, connection tracking, bridge filter)
- MAC address filter, Invalid-packet-filter
- NAT (IPv4, IPv6, PAT, 1-to-1, SNAT, port forwarding)
- Synchronous routing
- Configurable MTU
- Path MTU discovery
- TCP MSS adjustment
- Diffserv (set DSCP bits)
- QoS packet prioritization
- Reverse path filter

VPN

GRE

- GRE, GRE IPv6, GRE TAP, GRE TAP IPv6
- Configurable MTU and MTU inherit
- NHRP dynamic tunnel management

mGRE

- Configurable MTU and MTU inherit
- NHRP dynamic tunnel management
- NHRP IPv6

IPsec

- IPsec IPv4, IPv6
- IKEv1, IKEv2
- Authentication: PSK, public key, RSA and ECDSA certificate
- Tunnel and transport mode
- VTI (Virtual Tunnel Interface)
- Encryption algorithms AES, AES192, AES256, CCM+GCM, DES, 3DES
- RSA key length up to 8192 bit, elliptic curves
- Throughput max. 60 Mb/s
- Throughput (3des-sha1-modp1024) 21 Mb/s
- Throughput (aes-sha256-modp4096) 39 Mb/s
- VPN gateway
- Min. number tunnels: 5

L2TP

- Unmanaged L2TPv3 tunnel
- VLAN tagged L2TPv3 tunnel

Open VPN

- PSK, user and certificate authentication
- Min. number tunnels: 5
- OpenVPN Layer 2 and 3
- Bridging OpenVPN Layer 2 Tunnel
- Encryption algorithms AES, AES192, AES256, CCM+GCM, Blowfish, DES, 3DES

MIP

- Mobile IP foreign agent

Router management

- RS-232 management console
- Authentication by TACACS+, RADIUS, password file and public key
- Administrator roles
- Command line interface (CLI)
- Remote configuration file download (HTTP/HTTPS)
- Trigger based configuration selection
- OSCP
- Authentication by HTTP basic auth and certificate
- Remote software updates
- Central bulk management of routers

Services *)

- Cronjob
- DHCP server (IPv4+IPv6)
- DHCP relay (IPv4+IPv6)
- DHCP snooping (IPv4)
- DHCP address pools per VLAN/interface
- DHCP secure ARP
- DHCP ARP ping before assigning lease
- DHCP accounting (RADIUS)
- Static DHCP (MAC)
- DNS server and proxy
- DynDNS client
- EST (Enrolment over Secure Transport)
- Ethernet port security (sticky MAC detection)
- Hotspot portal
- IPv6 SLAAC daemon
- LLDP
- NMEA 1)
- NTP client, server, MD5, local time source
- SCEP (Simple Certificate Enrolment Protocol)
- SNMPv2 and SNMPv3, monitoring and traps
- SNTP (Simple NTP)
- SSH client, server
- Syslog local, remote, persistent in flash
- Telnet client, server

Other functions

- Configurable LED (also project based)
- Hardware and software watchdogs
- LXC virtualization, busybox and Alpine (project based)
- Status monitor (ping, interface status, IPv6-RS, RX-TX, script)
- Reset to factory defaults
- Customer defined factory defaults
- Security hardening (switch off unsecure features)
- Encrypted configuration
- Serial-to-network proxy (ser2net), IPv4/IPv6, TCP/UDP
- Serial modes: Console, Off and Script
- Scripting interface
- Open APIs for network integration

*) Prerequisite is a suitable interface.
1, 2, 3, 4) Please see "Hardware Features".

ORDERING INFORMATION

| Garderos model number: | Ethernet (10/100/1000 Base-T) | RS-232 (console) | WLAN (802.11ac a/b/g/n) | 2G/3G/4G Moduli ¹⁾ 4G Moduli ²⁾ 2G/4G Moduli ³⁾ | CDMA 450 Module ⁴⁾ | ECE type approval (E24) (Valid for router variants with radio modules ^{2,4)}) | Maximum operating temperature range (The temperature range may differ depending on the router variant) |
|-----------------------------|-------------------------------|------------------|-------------------------|--|-------------------------------|--|---|
| R-4724 (2xLAN/4G/2xWLAN) | 2 | 1 | 2 | 1 | | X | -25°C to +70°C |
| R-4742 (2xLAN/4G/CDMA/WLAN) | 2 | 1 | 1 | 1 | 1 | X | -25°C to +70°C |
| R-4752 (2xLAN/4G/4G/WLAN) | 2 | 1 | 1 | 2 | | X | -25°C to +70°C |
| R-4773 (2xLAN/CDMA/2xWLAN) | 2 | 1 | 2 | | 1 | X | -25°C to +70°C |

^{1, 2, 3, 4)} Please see "Hardware Features".

Garderos GmbH
Balanstrasse 55
81541 München
Germany

www.garderos.com
Email: info@garderos.com

T: +49 89 189306-0
F: +49 89 189306-98

All trademarks shown are registered trademarks of their respective owners.
 Please note that all data and information subject to technical modifications.
 © 2024: Garderos GmbH | Data Sheet R-4700 Series | Version 1.05 – February 2024